

Specifications

Construction: Rigid Core Stone Polymer Composite

Edge Type: Micro Beveled

Overall Thickness: 5.5mm
1.5mm XPE attached

Wear Layer: 12 MIL (0.03mm) + Ceramic Bead Finish

Length: 48" Width: 7"

Coverage per Carton: 18.91sft.

Pieces per Carton: 8

Weight per Carton: 48 lbs.

Installation Method: Floating

Recommended Usage: Residential & Light Commercial



This product is protected by a 20 Year residential / 5 Year light commercial warranty



This floor is waterproof and won't be affected by household spills

Features

The Mega Core Collection Rigid Core SPC flooring is constructed with a high density thermo- plastic composite which is extremely stable and can be installed over most subfloors. Since there are no wood fibers, these floors are 100% waterproof and can be wet mopped. The natural embossing allows for an authentic natural wood look while the rigid core resists indentations and wear from everyday household traffic.


Recommended Underlayment

- Plastic Vapor Barrier

Technical Data

 <p>GREENGUARD PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS UL COM/CC UL 2818</p>	<p>GREENGUARD Certification ensures that a product has met some of the world's most rigorous and comprehensive standards for low emissions of volatile organic compounds (VOCs) into indoor air.</p>
 <p>floor score CERTIFIED BY SCS Global Services</p>	<p>FloorScore® is the most recognized indoor air quality (IAQ) certification standard for hard surface flooring materials, adhesives, and underlayments.</p>

Accessories

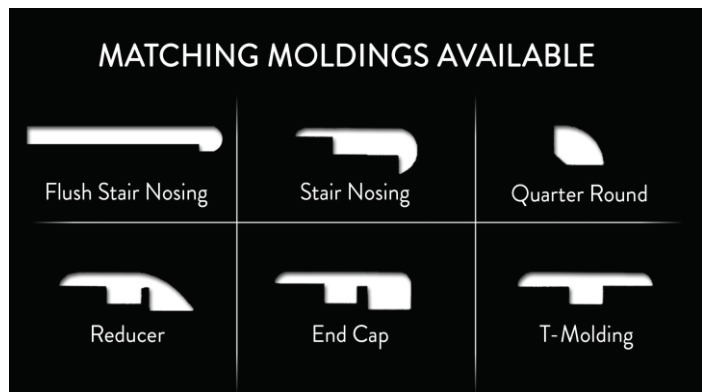

Product	Overall Thickness	5.5mm (with 1.5mm XPE Pad)	
Dimensions	Width and Length	180mm W x 1220mm L	
Packaging (Per Carton)	8 Planks	18.91sf/box	48 lbs.
Construction	Top Layers	High Definition Decor Film Enhanced Polyurethane Coating with Ceramic Bead 12 MIL Wear Layer	
	Core	3.7mm Limestone Composite: min. 64% stone, 0% wood, 100% Virgin Material	
	Density	1900kg/m ³ ±10%	
	Pad	1.5mm XPE pad attached	
	Bevel	Micro Beveled	
Installation	Floating Glueless Click		
Under Floor Heating	Approved - See installation manual for details.		
Warranty	20 Years Residential / 5 Years Light Commercial See warranty guide for details.		
Test Data			
Static Load	ASTM F970	2000PSI	
Heat Exposure Resistance F1700(70°C/6h)	ASTM F2199 EN16511	≤0.10%	
Swelling after submersion	NALFA LF 01-2011	0% Class 4, Heavy Commercial	
IIC & STC	ASTM E492 / ASTM E90	IIC Rating = 65 / STC = 61	
Castor Chair Resistance	ISO 4918	Pass	
Fire Rating	ASTM E648/ 662	Class I	
Wear Resistance	EN 13329 method A	Class 33, Heavy Commercial	
F1700	EN 16511	Class 34, Heavy Commercial	
Impact Resistance (Big Ball)	NALFA LF01-2011 EN 16511	Class 4, Heavy Commercial IC3, Class 34, Heavy Commercial	
Impact Resistance (Small Ball)	NALFA LF01-2011	Class 4, Heavy Commercial	
Static coefficient of Friction	ASTM D2047	Dry: 0.38, Wet: 0.9	
Resistance to staining F1700	ASTM F925 NALFA LF01-2011	Pass Class 4, Heavy Commercial	
Chemical Composition			
VOC	FloorScore™	Pass California 01350	
Ortho-phthalates	Prop 65	Not Detected / In Compliance	
Lead	CPSIA	None Detected	
Substances of Very High Concern (SVHC) (Mercury, Chromium VI, Cadmium, SCCp, Benzene, Xylene, Tributyltin, etc.)	Not Detected		